


2007

MCE
ELECTRIC
HEATING &
ELECTRIC
COOLING

MHP
ELECTRIC
HEAT PUMP

NEW!
MGE (1-2 1/2 Tons)
GAS HEATING &
ELECTRIC
COOLING

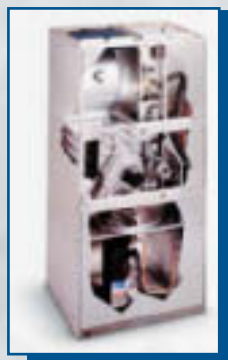

UNIT SPECIFICATIONS - NEW MODELS

MODEL	MGE	MHP	MCE
HEATING CAPACITIES	36 – 48 – 60 Mbtu	3 – 5 – 7 – 10 kW	3 – 5 – 7 – 10 kW
HEATING EFFICIENCY	80% AFUE	3.2 – 3.4 COP 7.0 – 7.4 HSPF	100% AFUE
COOLING CAPACITIES (Nominal Tons)	1, 1.5, 2, 2.5	1, 1.5, 2, 2.5	1, 1.5, 2, 2.5
COOLING EFFICIENCY (SEER)	10.6 & 12.0	10.6 & 12.0	10.6 & 12.0
OUTDOOR SOUND POWER (Decibels)	70 -74	70 -74	70 -74
AIR VOLUME RANGE (CFM @4" ESP)	400 - 1030	400 - 1030	400 - 1030
WALL OPENING	29"W x 29" H 29"W x 32-1/4" H	29"W x 29" H 29"W x 32-1/4" H	29"W x 29" H 29"W x 32-1/4" H
FOOT PRINT	28-1/16"W x 24-3/8" H	28-1/16"W x 21-1/2" H 28-1/16"W x 24-3/8" H	28-1/16"W x 21-1/2" H 28-1/16"W x 24-3/8" H
WEIGHT	235 - 305 lbs.	185 - 255 lbs.	165 - 235 lbs.


All specifications are subject to change without notice.



Thru-the-Wall Combination

Gas Heating- Electric Cooling

For condominiums, apartments, hotel rooms and all multi-unit applications. Magic-Pak self-contained ducted systems.

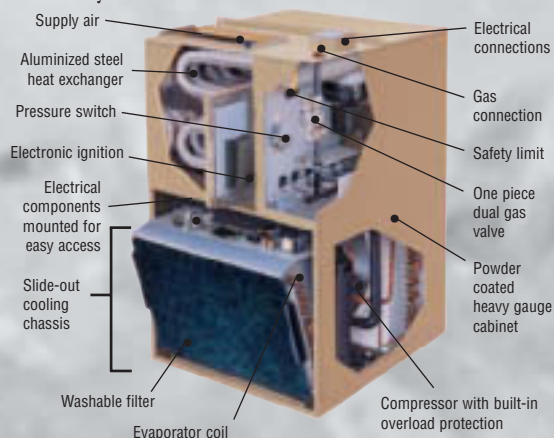

Features:

- Slide-Out Cooling Chassis
- Mounts Flush to Any Outside Wall
- Easily Installed
- Requires No Chimney
- The alternative to central systems allows individual metering and control and eliminates building wide shut-downs.
- The alternative to split systems, no condensers on roof or grounds. No refrigerant lines necessary.
- The answer to all HVAC requirements, provides both heating and cooling in oneself-contained package.

Heat Pump and Electric Heating - Electric Cooling Models Also Available

Heating Section

MODEL NUMBER	26HWC124	51HWC184	51HWC244	64HWC244
Rated Input-BTU/H	26,000	51,000	51,000	64,000
Capacity-BTU/H*	20,000	40,000	40,000	50,000
Efficiency-AFUE**	80%	80%	80%	80%
CFM-Blower Speed	650 High	875 High	875 High	875 High

Cooling Section

Capacity-BTU/H*	12,000	17,800	23,600	23,600
Efficiency-SEER	10.6	10.6	10.6	10.6
CFM	615@0.3in.W.C.	825@0.3in.W.C.	825@0.3in.W.C.	825@0.3in.W.C.

Cooling Section 208-230 Volts-Single Phase

Compressor	Rotary	Rotary	Scroll	Scroll
R.L.A.	5.0	8.3	11.6	11.6
L.R.A.	26.3	45	62.5	62.5
Blower Size-in.	10X4	10X4	10X4	10X4
Blower Motor-hp	1/6	1/3	1/3	1/3
Minimum Circuit Ampacity	8.3	13.6	18.6	18.6
Fuse Size-amps	15	20	25	25
Condenser Fan Size-in.	18	18	18	18
Condenser Motor-hp	1/8	1/8	1/4	1/4
Approx. Ship Weight-lbs.	325	350	360	360

Capacity ratings are based on D.O.E. standard tests.
Energy efficiency ratings are based on US Government standard tests.

LUCE, SCHWAB & KASE, INC., PHONE: 1-800-458-7329 FAX: 973-227-8750