


# CITY MULTI®

Variable Refrigerant Flow Zoning System

- The Complete Zoning System that Delivers Incomparable Performance!
- Simultaneous Heating and Cooling
- Quiet Operation
- Two-pipe System: Easy to Install and Reliable
- Ductless and Ducted Type Indoor Units
- City Multi equipment now uses refrigerant **R410A**

## The World's First & Only Simultaneous Heating and Cooling Two-pipe System!

Comprehensive Controls System with Integrated Networking Abilities




PAC-YT51CRA



PAR-F27MEA  
PAR-21MAA



G50-A

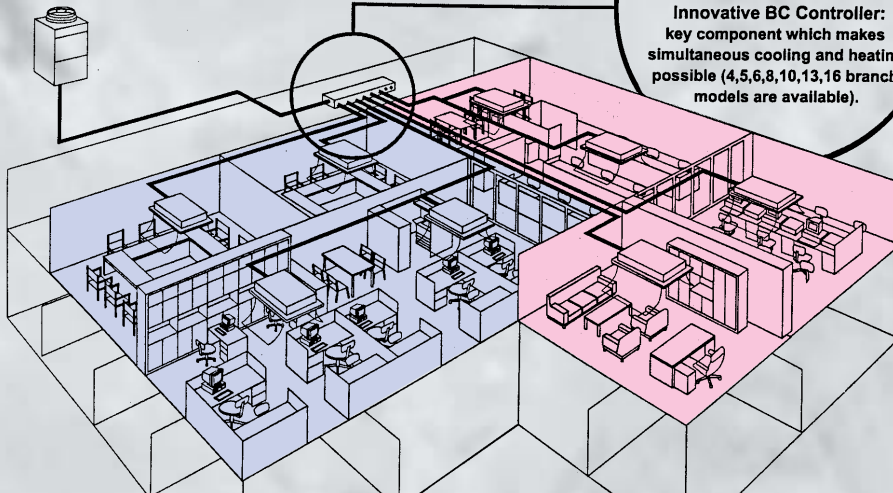

**NEW** City Multi Now has 11 capacities ranging from 4 to 20 tons to match your specific needs. City Multi can now connect from 1 to 32 indoor units.

Capacity Code	Wall-mounted PKFY-P- NAMU/NGMU/NFMU-E	Ceiling-recessed Cassette PLFY-P-NAMU-E	Ceiling-recessed Cassette PMFY-P-NBMU-E	Ceiling-concealed (ducted) PDFY-P-NMU-E	Ceiling-concealed (ducted low profile) PEFY-P-NMLU-E	Ceiling-concealed (ducted alternate high static) PEFY-P-NMHU-E	Ceiling-concealed (ducted 100% outside air) PEFY-P-NMHU-E-F	Floor-standing (exposed/concealed) PFFY-P-NEMU/NRMU-E
Nominal Btu/h								
6,000 Btu/h	•		•	•	•			•
8,000 Btu/h	•		•	•	•			•
12,000 Btu/h	•	•	•	•	•			•
15,000 Btu/h	•	•	•	•		•		•
18,000 Btu/h	•	•		•		•		•
24,000 Btu/h	•	•		•		•		•
27,000 Btu/h				•		•		
30,000 Btu/h	•	•		•		•	•	
36,000 Btu/h		•		•		•		
48,000 Btu/h				•		•		
54,000 Btu/h						•	•	
72,000 Btu/h						•	•	
96,000 Btu/h						•	•	