



It's in the Code. Effective February 2009 the International Mechanical Code and International Residential Code now require that all outdoor access ports on AC Refrigerant circuits be made tamper resistant.

International Mechanical Code 1101.10 - Locking access port caps. "Refrigerant circuit access ports located outdoors shall be fitted with locking-type tamper resistant caps."

International Residential Code M1411.6 - Locking access port caps. "Refrigerant circuit access ports located outdoors shall be fitted with locking-type tamper resistant caps."

Why? Misuse of refrigerant gas has come into sharp focus within the last few years due to reports of injury/fatality related to the venting and inhalation of the toxic refrigerant gases from AC systems and storage tanks containing refrigerant gas. The Novent locking cap system was developed as a simple yet effective way to deter misuse, reduce venting and energy loss, provide protection from serious injury or liability and meet the new industry code.

ORDERING INFORMATION

Pink R410 Cap 1/4" Thread

NP-R410 2PK

NP-R410 10PK

NP-R410 50PK

Green R22 Cap 1/4" Thread

NG-R22 2PK

NG-R22 10PK

NG-R22 50PK

Euro Pink R410 cap 5/16" Thread

NPE-R410 2PK

NPE-R410 10PK

NPE-R410 50PK

Silver Cap - any gas 1/4" Thread

NS-UNI 2PK

NS-UNI 10PK

NS-UNI 50PK

Starter pack - cap assortment
Includes (3) R22, (3) R410, (1) Multi key

NG-STARTPAK

Multikey - fits all caps

NV MULTI-KEY

Screwdriver key
fits Pink & Euro Pink pink caps

NP-R410 SDT

Screwdriver key
fits Green & Silver caps above

NG-R22 SDT

NOVENT®
IRC & IMC compliant
color coded refrigerant
protection.



One simple screw-on installation. Dual protection.



ID embossed, color coded caps prevent costly gas mixing.

Instant, inexpensive protection. Patented Novent locking caps seal standard Schraeder service valves on all central AC units and minisplits.




PATENT NO. US 6,612,455 B2

- Integral neoprene O-ring enhances seal and resists oils and chemicals.
- Integral torque limiter prevents overtightening.
- Resists crushing & removal without key.
- Corrosion resistant.
- Selection of Installation tools available.

1 Gas intoxication protection
Novent caps lock. Caps are precision machined from high grade brass and surrounded by a protective aluminum shroud making it difficult to access the refrigerant. Special tools are required to apply or remove caps.

2 Gas mixing protection
Novent caps are embossed and color coded. Proper installation safeguards against accidental mixing of refrigerant gases in AC systems.

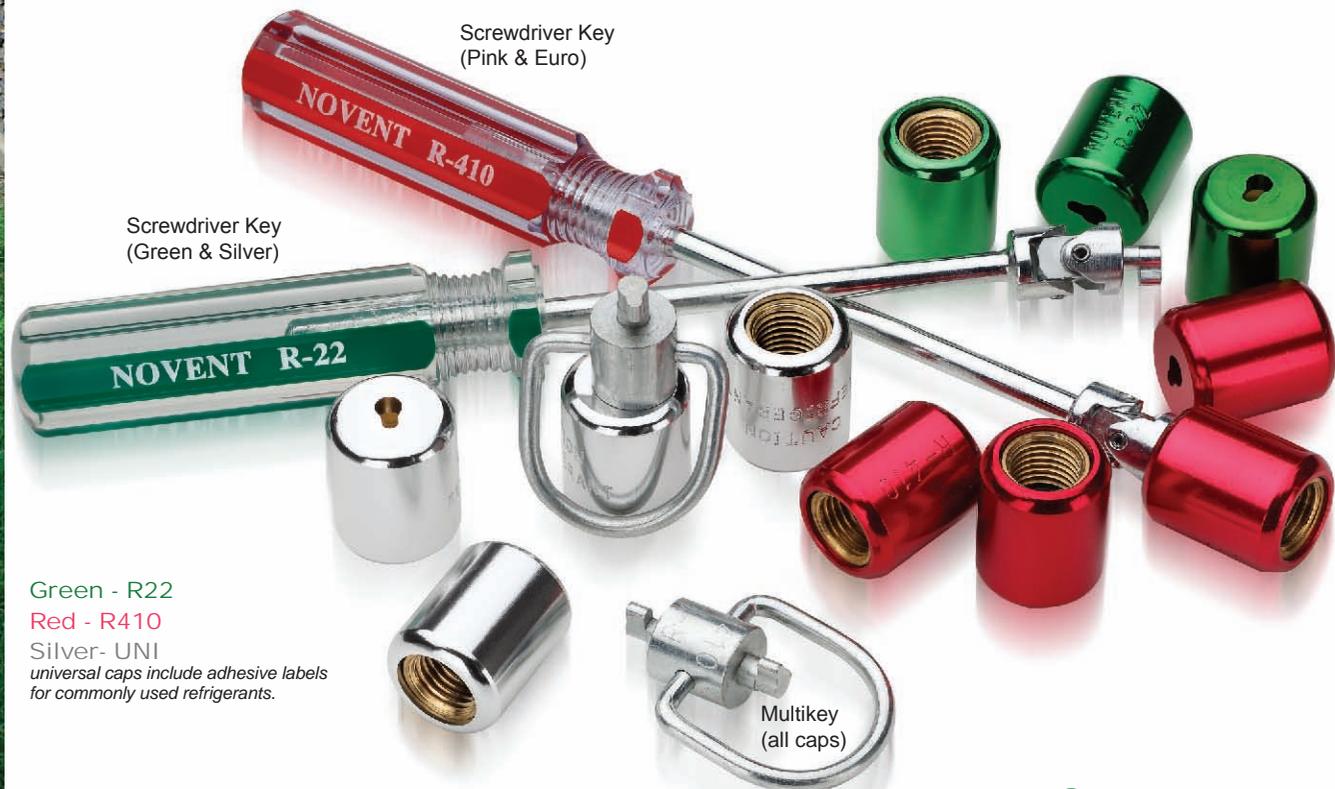

Screwdriver Key (Pink & Euro)

Screwdriver Key (Green & Silver)

Green - R22
Red - R410
Silver- UNI
universal caps include adhesive labels for commonly used refrigerants.

Multikey (all caps)

NOVENT®